



FEATURES:

- RoHS compliant SIP7 package
- High efficiency up to 79%
- I/O Isolation 6000 VDC
- Low coupling capacity
- Physical clearance of Isolation barrier 2.5mm
- Safety barrier 100% production tested
- Rated working voltage of 250 Vrms
- Continuous Short Circuit protection

Models

Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	*Maximum output ripple & noise (mV p-p)	Switching frequency (kHz)	Efficiency (%)
AM1DC-0503SH60Z	5	3.3	303	200	25	71
AM1DC-0505SH60Z	5	5	200	200	24	75
AM1DC-0509SH60Z	5	9	111	150	24	77
AM1DC-0512SH60Z	5	12	83	150	35	76
AM1DC-0515SH60Z	5	15	67	150	36	77
AM1DC-1203SH60Z	12	3.3	303	200	30	70
AM1DC-1205SH60Z	12	5	200	200	30	74
AM1DC-1209SH60Z	12	9	111	150	30	76
AM1DC-1212SH60Z	12	12	83	150	31	76
AM1DC-1215SH60Z	12	15	67	150	31	76
AM1DC-2403SH60Z	24	3.3	303	150	43	70
AM1DC-2405SH60Z	24	5	200	150	42	71
AM1DC-2409SH60Z	24	9	111	120	44	70
AM1DC-2412SH60Z	24	12	83	150	43	72
AM1DC-2415SH60Z	24	15	67	150	45	73

Models

Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	*Maximum output ripple & noise (mV p-p)	Switching frequency (kHz)	Efficiency (%)
AM1DC-0503DH60Z	5	±3.3	±152	±120	23	73
AM1DC-0505DH60Z	5	±5	±100	±120	23	75
AM1DC-0509DH60Z	5	±9	±56	±75	24	79
AM1DC-0512DH60Z	5	±12	±42	±75	36	77
AM1DC-0515DH60Z	5	±15	±33	±75	35	77
AM1DC-1203DH60Z	12	±3.3	±152	±120	32	72
AM1DC-1205DH60Z	12	±5	±100	±120	30	73
AM1DC-1209DH60Z	12	±9	±56	±75	31	75
AM1DC-1212DH60Z	12	±12	±42	±75	31	74
AM1DC-1215DH60Z	12	±15	±33	±75	31	76
AM1DC-2403DH60Z	24	±3.3	±152	±100	43	72
AM1DC-2405DH60Z	24	±5	±100	±100	42	69
AM1DC-2409DH60Z	24	±9	±56	±75	41	73
AM1DC-2412DH60Z	24	±12	±42	±100	43	72
AM1DC-2415DH60Z	24	±15	±33	±100	47	75

*Output ripple and noise are measured without external connection of filtering capacitors. For reducing these values please refer to the recommended circuit below.

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5 12 24	4.5-5.5 10.8-13.2 21.6-26.4		VDC
Filter	Capacitor			
Turn on Transient process time	5 Vin 12 Vin 24 Vin	760 300 280		µs
Start up time	5 Vin 12 Vin 24 Vin	2.8 2.3 2.24		ms
Absolute Maximum Rating	5 Vin 12 Vin 24 Vin	0-7 0-15 0-28		VDC
Peak Input Voltage time			100	ms
Quiescent Current	5 Vin 12 Vin 24 Vin	30-40 20 10-15		mA
Rise time	5 Vin 12 Vin 24 Vin	180 200 180		µs
Input Reflected Ripple current	Thru 12µH inductor, 5Hz to 20MHz		20	mA rms

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage (rated for 1 min)	Flash tested for 3sec.		6000	VDC
Rated working voltage		250		V rms
Resistance		>1000		MOhm
Capacitance		10		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±3		%
Voltage balance (Dual output model)	Balanced Load	±1		%
Short Circuit protection		Continuous		
Short circuit restart		Auto recovery		
Line voltage regulation	For 1% change of V in	±1.2		%
Load voltage regulation	From 10 to 100% load	±10		%
Temperature coefficient		±0.03		%/°C
Maximum Capacitive load	Single output models Dual output models		220 ±100	µF

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	See models table		KHz
Clearance Distance	Input to Output	2.5		mm
Operating temperature	Full Load without Derating	-40 to +70		°C
Storage temperature		-40 to +125		°C
Maximum case temperature			100	°C
Cooling	Free air convection			
Humidity			95	% RH
Case material	Non-conductive black plastic, epoxy encapsulated (UL94V-0 rated)			
Soldering temperature	1.5mm from case for 10 sec.		260	°C
Weight		4.2		g
Dimensions (L x W x H)		0.77 x 0.39 x 0.47 inches	19.56 x 9.80 x 12.00 mm	
MTBF		>2 390 000 hrs (MIL-HDBK-217 F at +25 °C)		

NOTE: All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications


Standards

Safety	Meets IEC 60950-1: 2001
--------	-------------------------


Pin Out Specifications

Pin	1000 VDC	
	Single	Dual
1	+ V Input	+ V Input
2	- V Input	- V Input
5	- V Output	- V Output
6	No pin	Common
7	+ V Output	+ V Output


Dimensions

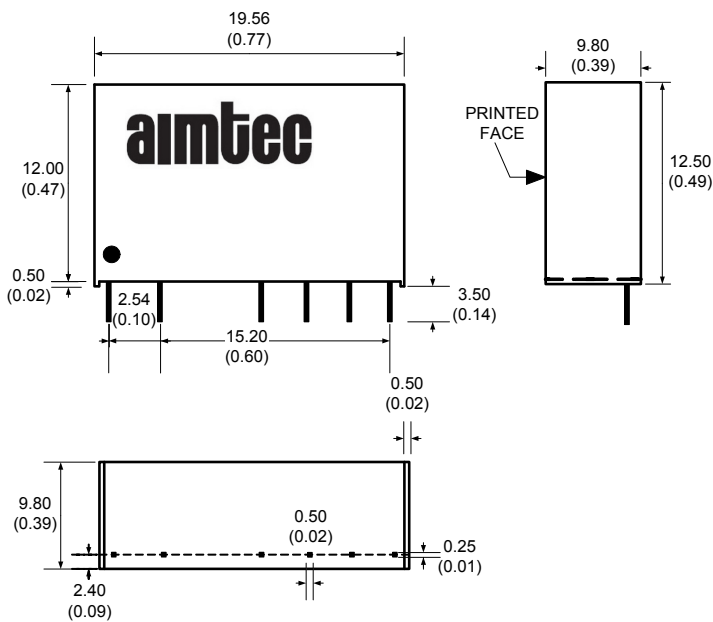

Derating

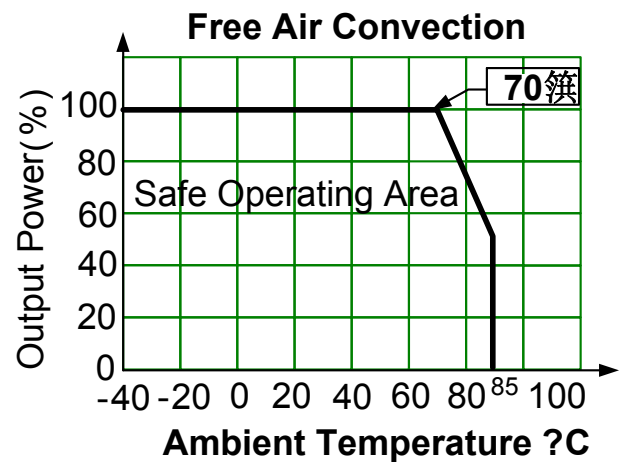

Recommended Application circuit for reducing the output ripple and noises:

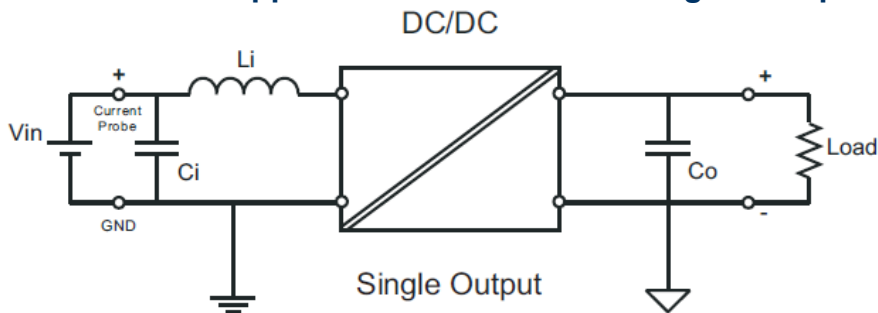

Recommended Output Capacitor to reduce the converter's ripple and noises for single output models is 4.7 μ F to 100 μ F and for dual output models is 4.7 μ F to 68 μ F connected to both outputs.

L_i with value of 12 μ H and C_i with value 10 μ F to 100 μ F are recommended to be connected to the input of the converter for EMI improvement.

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.