



FEATURES:

- RoHS compliant
- Wide 4:1 input range
- Low ripple and noise
- Remote On/Off control
- Power modules for PCB mounting
- Regulated output
- Operating temperature range: -40 to +85°C
- Capacitive loading up to 4500 μF (18-75V input)

Models
Single output



Model	Input Voltage (V)	Output Voltage (V)	Output Current max (A)	Ripple & Noise typ	Isolation (VDC)	Efficiency (%)
AM15EW-2403SIZ	9-36	3.3	4	80mV p-p	1500	77
AM15EW-2405SIZ	9-36	5	3	80mV p-p	1500	80
AM15EW-2412SIZ	9-36	12	1.25	120mVp-p	1500	85
AM15EW-2415SIZ	9-36	15	1	150mVp-p	1500	84
AM15EW-4803SIZ	18-75	3.3	4	80mV p-p	1500	77
AM15EW-4805SIZ	18-75	5	3	80mV p-p	1500	80
AM15EW-4812SIZ	18-75	12	1.25	120mVp-p	1500	85
AM15EW-4815SIZ	18-75	15	1	150mVp-p	1500	84

Models
Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (A)	Ripple & Noise typ	Isolation (VDC)	Efficiency (%)
AM15EW-2405DIZ	9-36	± 5	± 1.5	50mVp-p	1500	80
AM15EW-2412DIZ	9-36	± 12	± 0.625	120mVp-p	1500	85
AM15EW-2415DIZ	9-36	± 15	± 0.5	150mVp-p	1500	84
AM15EW-4805DIZ	18-72	± 5	± 1.5	50mVp-p	1500	80
AM15EW-4812DIZ	18-72	± 12	± 0.625	120mVp-p	1500	85
AM15EW-4815DIZ	18-72	± 15	± 0.5	150mVp-p	1500	84

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	24 48	9-36 18-75		VDC
Filter	π (Pi) Network			
Absolute Maximum Rating	24 Vin 48 Vin		40 83	VDC
Permissible absolute maximum duration			2	h

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		1500	VDC
Resistance		> 1000		MOhm
Capacitance		1000		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		± 2		%
Short Circuit protection		Continuous		
Short Circuit restart		Auto recovery		
Over voltage protection		Zener diode clamp protection		

Output Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Over load protection	Auto recovery	Over 110% full load		
Line voltage regulation (Single)	HL-LL	±0.5		%
Line voltage regulation (Dual)	HL-LL	±0.5		%
Load voltage regulation (Single)	25-100%	±0.5		%
Load voltage regulation (Dual)	25-100%	±2		%
Temperature coefficient		±0.05		%/°C

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	200		KHz
Operating temperature	With derating above +75		-40 to +85	°C
Storage temperature			-55 to +115	°C
Max Case temperature			95	°C
Cooling	Free air convection			
Humidity			95	%
Case material	Nickel coated copper with non-conductive base			
Weight		33		g
Dimensions(L x W x H)	Tolerance ±0.5mm	2.00 x 1.00 x 0.40 inches	50.80 x 25.40 x 10.50 mm	
MTBF	> 800 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)			




Safety Specifications

Parameters	
Agency Approvals	CE
Standards	EN 55022, EN 55024
	IEC61000-3-2
	IEC61000-3-3
	IEC61000-4-2, Perf. Criteria B
	IEC61000-4-3 Perf. Criteria A
	IEC61000-4-4, Perf. Criteria B
	IEC61000-4-6, Perf. Criteria A
	IEC61000-4-8, Perf. Criteria A
NOTE: also designed to meet standard IEC 60950-1:2001	

Pin Out Specifications


Pin	Single	Dual
1	On/Off Control	On/Off Control
2	-V Input	-V Input
3	+V Input	+V Input
4	-V Output	-V Output
5	No pin	Common
6	+V Output	+V Output

Dimensions

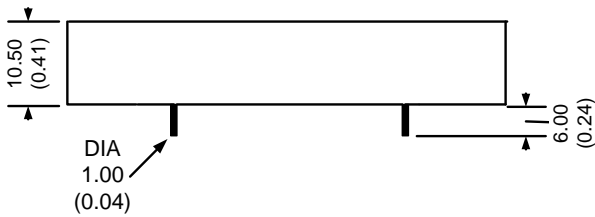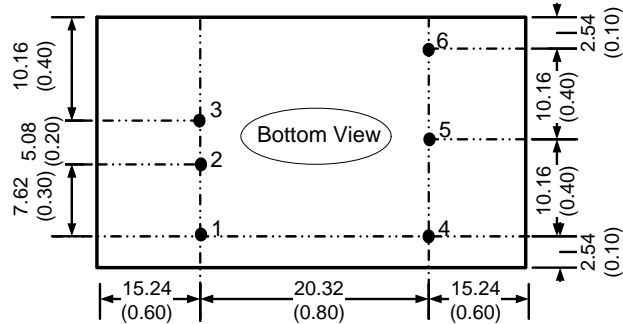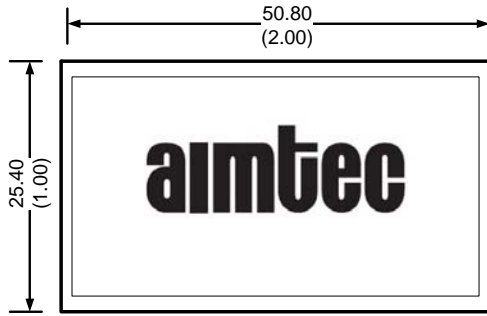


Notes:
All dimensions are typical
in millimeters (inches).
Tolerance ± 0.25 (± 0.01)

Derating

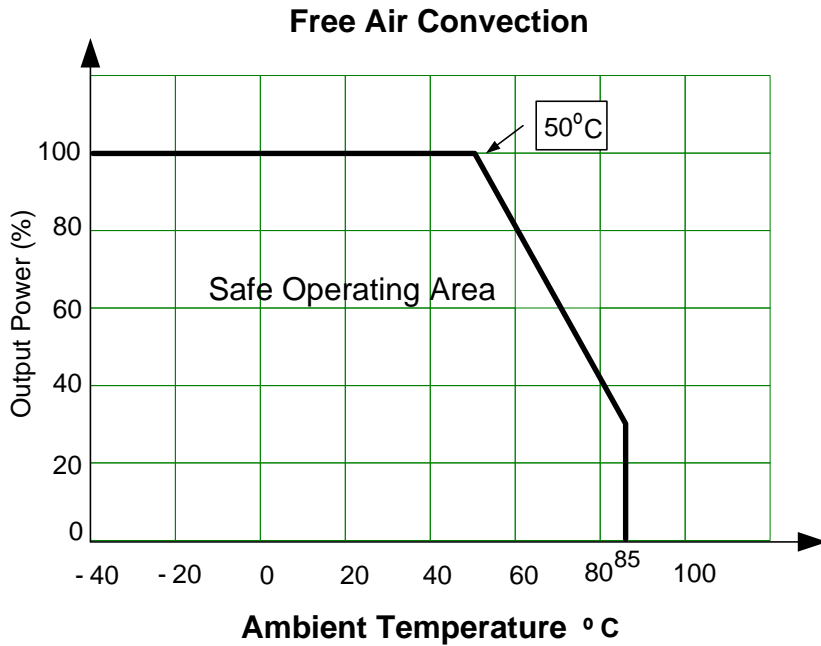


Block diagram

Single Output

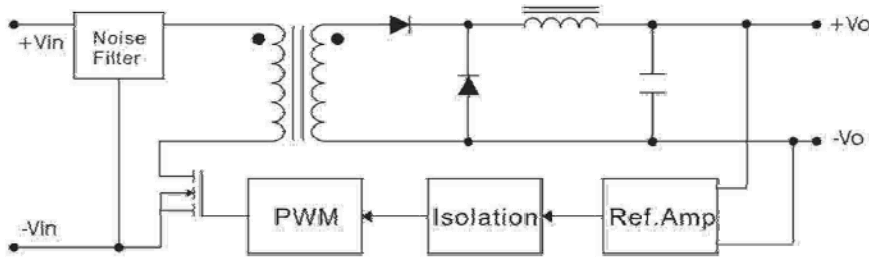

Dual Output

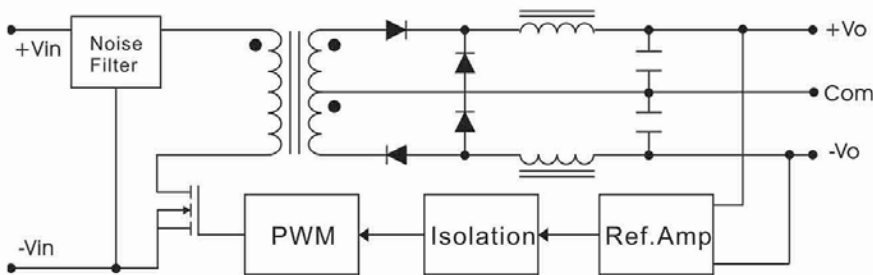

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.